



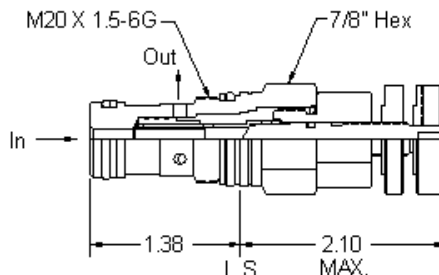

# GAFC13

## Flow Control Valve

Pressure Compensated  
Adjustable  
6 gpm (23L/min)  
T-13A Cavity



Operation	Controls flow from the bottom port to the side port at an adjusted value over a varying pressure range. Internal check allows free reverse flow.	
Type	Adjustable pressure compensated flow control.	
Material	Precision ground & honed, hardened steel parts. Buna-N seals standard. Zinc plated.	
Maximum Pressure	5,000 psi	(350 bar)
Flow	Adjustable range from 1 to 6 gpm	(23 L/min)
Fluid	General hydraulic fluid	
Cavity	T-13A	
Install torque	30-35 lb-ft	(45-50Nm)

Options

<b>GAFC13</b>	-	<b>6</b>	-	<b>K</b>		<b>N</b>
Basic cartridge		Adjustment Range 6 - 1 to 6 gpm		Adjustment Type L - Screw Adjustment K - Knob Adjustment		Seals N - Buna-N V - Viton

