




# FIXED FLOW CONTROL

## PRESSURE COMPENSATED W/FREE REVERSE FLOW CHECK

In-line Female Pipe x Female Pipe

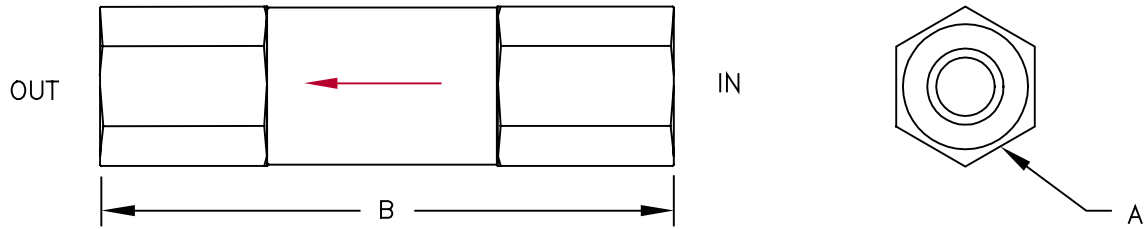

(Arrow indicates direction of controlled flow)



### SPECIFICATIONS

Type	Pressure compensated precision in-line flow control	Flow	Preset by factory to customer specified value (Tolerance: ±15%)
Operation	Controls flow in one direction to a preset maximum over a varying pressure range. Internal check allows free reverse flow.	Max. Pressure	3,000 psi
Material	All steel construction Zinc finish	Press. Differential	50 to 100 psi
Rated Flow	Up to 12 gpm	Fluid	General hydraulic fluid
		Operating Temp.	-40°F to +200°F
		Seals	Buna-n

### DIMENSIONS

Model	Inlet	Outlet	Flow Range	A Hex	B
1229-03-XX	3/8 NPT	3/8 NPT	.1 - 12 GPM	1 1/8	3.88

### ORDERING INFORMATION

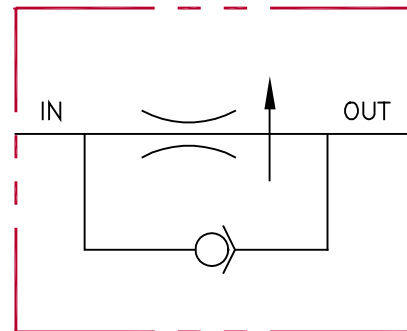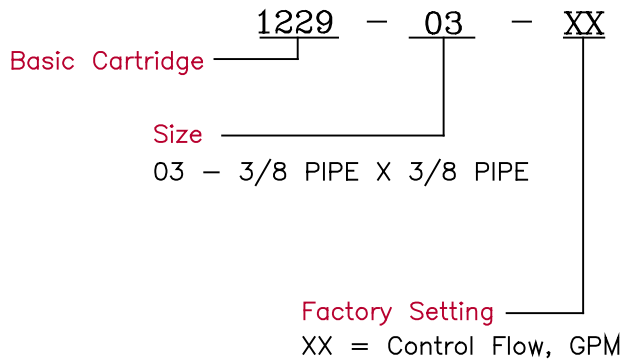

All dimensions in inches