


In-line Check Valves

Check Valve: Provides free flow in one direction and shuts off flow in the opposite direction.

Slip-In Check Valves Slip-In Check Valves

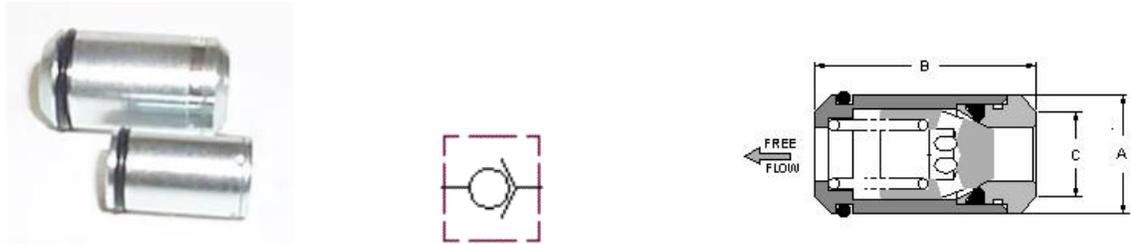

Type	Slip-in poppet type hydraulic check valve with a soft seat for Zero leak..
Material	All steel construction. Zinc plate finish.
Pressure	3,000 psi maximum
Crack Pressure	3 psi std, (Available in different crack pressures)
Seals	Buna-n, (External body O-ring included)
Fluid	General hydraulic fluid
Operating Temp.	-40 degrees F to +200 degrees F
Cavity	Fits in simple machined bore

Nominal Size	Model	Flow, gpm	Suggested Bore Dia., inch	"A", inch	"B", inch	"C", inch
5/16	1451-2	.75	.314/.312	.306/.311	.62	.172
1/2	1361-5	4	.502/.500	.499/.494	.84	.312
21/32	1366-5	5	.658/.656	.655/.650	1.22	.469
13/16	1516-5	9	.815/.812	.811/.806	1.50	.625
1	1480-5	15	1.002/1.000	.999/.994	1.56	.688