





CHECK VALVE SOFT SEAT POPPET

Slip In Cartridge

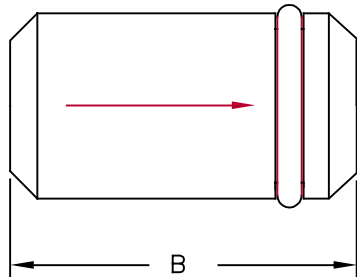

(Arrow indicates direction of free flow)



SPECIFICATIONS

Type	Miniature in-line check valve with a soft seat poppet	Max. Pressure	3,000 psi
Operation	Check valve provides free flow in one direction and shuts off flow in the opposite direction.	Crack Pressure	3 psi
Material	All steel construction Black oxide finish	Fluid	General hydraulic fluid
Rated Flow	Up to 5 gpm	Operating Temp.	-40°F to + 200°F
		Seals	Buna-n

DIMENSIONS

Model	Flow Range	Suggested Bore Dia	A Dia	B
CVC-50	4 GPM	.500/.502	.496	.840
CVC-65	5 GPM	.656/.658	.653	1.220

ORDERING INFORMATION

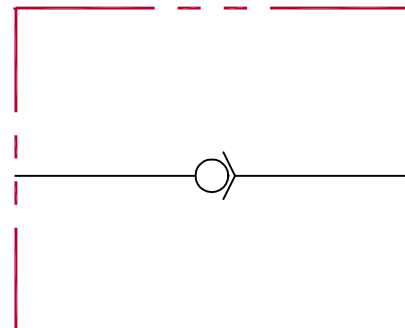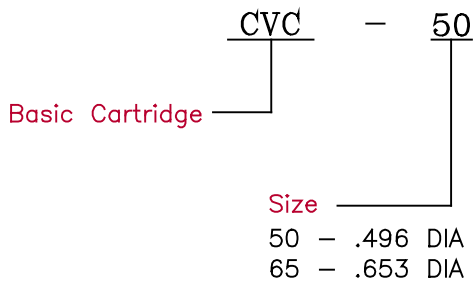

All dimensions in inches